



DTH drill pipe

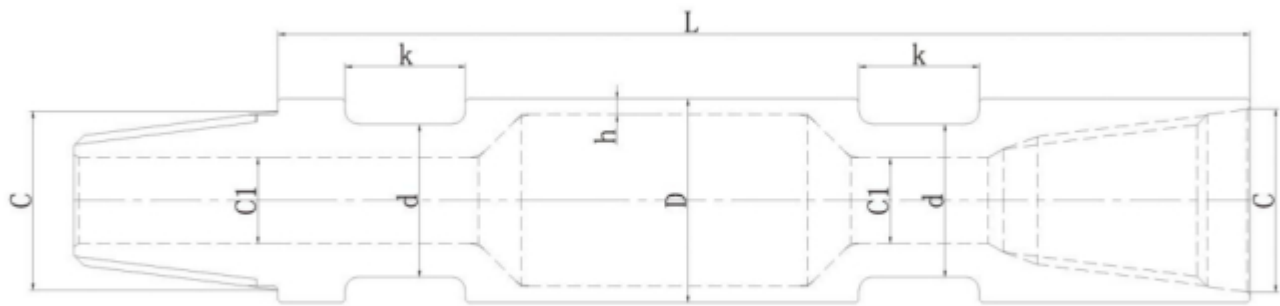

D	h	C	C1	d	k	L
OUTER DIAMETER	WALL THICKNESS	THREAD CONNECTION	INNER HOLE	FLAT		LENGTH
76MM(3")	6.5MM	API 2 3/8" REG	32MM	157MM	45MM	1000MM~9000MM
	8.5MM	API 2 3/8" REG	32MM	157MM	45MM	1000MM~9000MM
89MM(3 1/2")	6.5MM	API 2 3/8" REG	32MM	70MM	45MM	1000MM~9000MM
	8.5MM	API 2 3/8" REG	32MM	57MM	45MM	1000MM~9000MM
	6.5MM	NC26	40MM	70MM	45MM	1000MM~9000MM
	8.5MM	NC26	40MM	70MM	45MM	1000MM~9000MM
102MM(4")	6.5MM	API 3 1/2" REG	45MM	83MM	51MM	1000MM~9000MM
	8.5MM	API 3 1/2" REG	45MM	83MM	51MM	1000MM~9000MM
	6.5MM	NC31	45MM	83MM	51MM	1000MM~9000MM
	8.5MM	NC31	45MM	83MM	51MM	1000MM~9000MM
114MM(4 1/2")	6.5MM	API 3 1/2" REG	45MM	95MM	51MM	1000MM~9000MM
	8.5MM	API 3 1/2" REG	45MM	95MM	51MM	1000MM~9000MM
	6.5MM	NC38	60MM	95MM	51MM	1000MM~9000MM
	8.5MM	NC38	60MM	95MM	51MM	1000MM~9000MM
127MM(5")	8.5MM	API 3 1/2" REG	45MM	108MM	51MM	1000MM~9000MM
	8.5MM	NC38	60MM	108MM	51MM	1000MM~9000MM
133MM(5 1/4")	10MM	API 3 1/2" REG	45MM	114MM	51MM	1000MM~9000MM
146MM(5 3/4")	10MM	API 4 1/2" REG	60MM	127MM	55MM	1000MM~9000MM
168MM(6 5/8")	10MM	NC50	60MM	149MM	55MM	1000MM~9000MM
178MM(7")	10MM	API 4 1/2" REG	60MM	159MM	55MM	1000MM~9000MM

Customization is available


Reverse circulation drill pipe

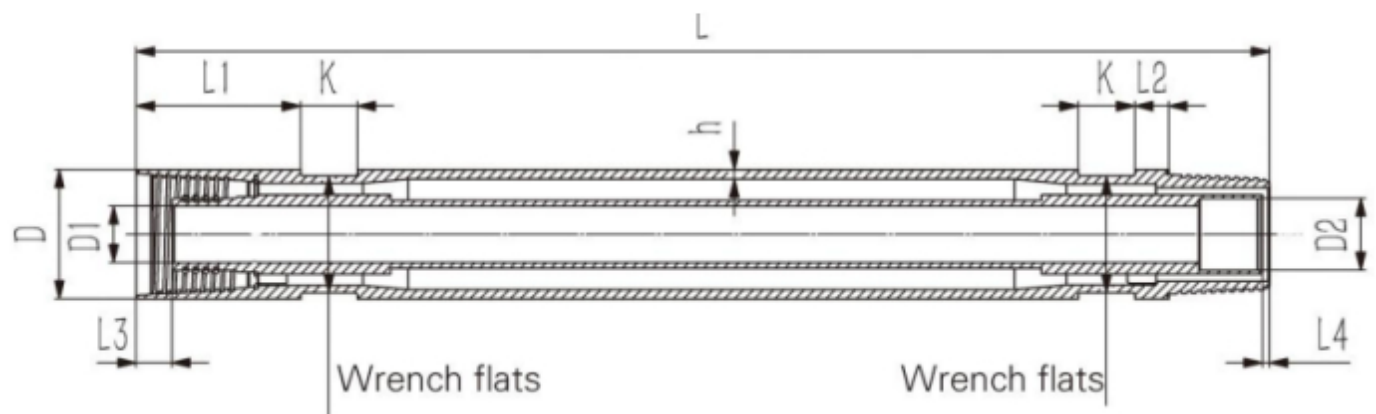

O.D. (mm)	Wall thickness (mm)	Thread type	Wrench flats (mm)	Flat width (mm)	Flat location (mm)		Inner tube to end (mm)		Inner tube sealing face size(mm)		Length (mm)
	h				L1	L2	L3	L4	D1	D2	
89	6.5	REMET 3.5	79	50	130	46	35	9	Φ49.5	Φ49.5	6000
	8.5	REMET 3.5	79	50	130	46	35	9	Φ49.5	Φ49.5	6000
102	6.5	REMET 4.0	91	50	104	30	35	7.5	Φ57.2	Φ57.2	6000
		METZKE 4.0	91	50	104	30	25.4	3.1	Φ54	Φ54	6000
	8.5	REMET 4.0	91	50	104	30	35	7.5	Φ57.2	Φ57.2	6000
		METZKE 4.0	91	50	104	30	25.4	3.1	Φ54	Φ54	6000
114	8.5	REMET 4.5	103	50	145	30	31.5	6.5	Φ63.5	Φ63.5	6000
		METZKE 4.5	103	50	145	30	48.2	0	Φ57.2	Φ57.4	6000
127	8.5	REMET 4.5	116	50	145	30	31.5	6.5	Φ63.5	Φ63.5	6000
		METZKE 4.5	116	50	145	30	48.2	0	Φ57.2	Φ57.4	6000

Customization is available


Anchoring drill pipe

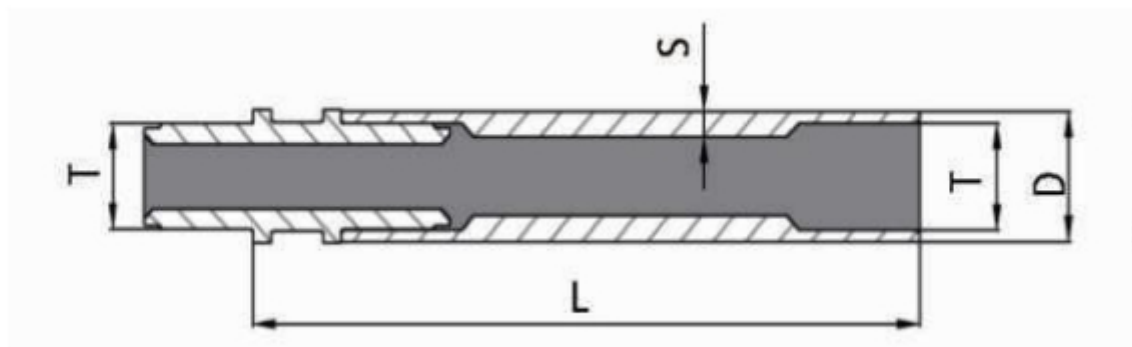

Model	D	S	T	L
	OUTER DIAMETER	WALL THICKNESS	THREAD CONNECTION	LENGTH
54 MM DRILL PIPE	54 MM (2 1/8")	8.5 MM	42	1000MM~9000MM
76 MM DRILL PIPE	76 MM (3")	10 MM	56	1000MM~9000MM
89 MM DRILL PIPE	89 MM (3 1/2")	15 MM	78	1000MM~9000MM
102 MM DRILL PIPE	102 MM (4")	15 MM	90	1000MM~9000MM

- I. The standard of thread is left-hand;
- II. It is thread between rod and adapter for the standard of connection;
- III. Friction welding connection is available upon request.

Large diameter drill pipe

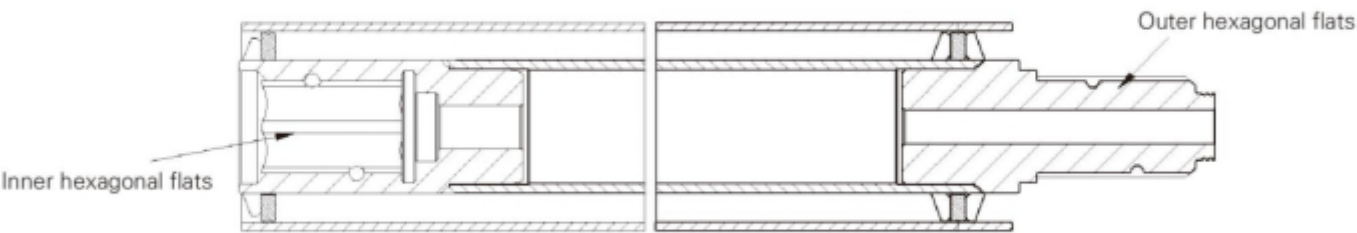

MODEL	OUTER DIAMETER	ADAPTER TYPE	LENGTH
426 mm drill pipe	426 mm	273 hexagonal	1000MM~9000MM
450 mm drill pipe	450 mm	273 hexagonal	1000MM~9000MM
508 mm drill pipe	508 mm	273 hexagonal	1000MM~9000MM
610 mm drill pipe	610 mm	273 hexagonal	1000MM~9000MM
711 mm drill pipe	711 mm	320 hexagonal	1000MM~9000MM
813 mm drill pipe	813 mm	320 hexagonal	1000MM~9000MM
914 mm drill pipe	914 mm	320 hexagonal	1000MM~9000MM

Custoomizaton is available