


Reverse circulation drill pipe

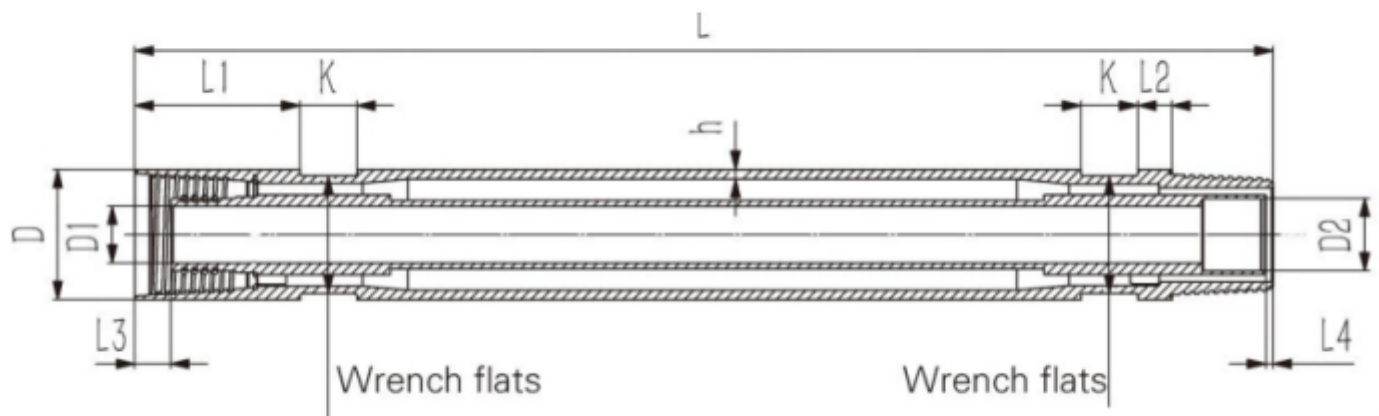

O.D. (mm)	Wall thicknes s (mm)	Thread type	Wrench flats (mm)	Flat width (mm)	Flat location (mm)		Inner tube to end (mm)		Inner tube sealing face size (mm)		Length (mm)
	h				L1	L2	L3	L4	D1	D2	
89	6.5	REMET 3.5	79	50	130	46	35	9	Φ49.5	Φ49.5	6000
	8.5	REMET 3.5	79	50	130	46	35	9	Φ49.5	Φ49.5	6000
102	6.5	REMET 4.0	91	50	104	30	35	7.5	Φ57.2	Φ57.2	6000
		METZKE 4.0	91	50	104	30	25.4	3.1	Φ54	Φ54	6000
	8.5	REMET 4.0	91	50	104	30	35	7.5	Φ57.2	Φ57.2	6000
		METZKE 4.0	91	50	104	30	25.4	3.1	Φ54	Φ54	6000
114	8.5	REMET 4.5	103	50	145	30	31.5	6.5	Φ63.5	Φ63.5	6000
		METZKE 4.5	103	50	145	30	48.2	0	Φ57.2	Φ57.4	6000
127	8.5	REMET 4.5	116	50	145	30	31.5	6.5	Φ63.5	Φ63.5	6000
		METZKE 4.5	116	50	145	30	48.2	0	Φ57.2	Φ57.4	6000